



Technical specifications




WIDTH	30	40	50	60	70	80	90	100	110	120	130	140	-	-	-	
Drawer inside	257	357	457	557	Combinations of several drawers											
External unit	315	415	515	615	715	815	915	1.015	1.115	1.215	1.315	1.415				

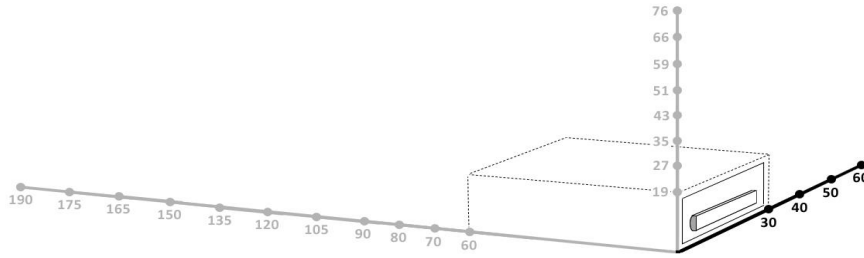

HEIGHT	19	27	35	43	51	59	66	76	84	92	100	108	115	123	131
Drawer inside	117	196	275	354	432	511	590	669	Combinations of several drawers						
Drawer rail height	86	86	188	188	330	330	330	330							
Height of partition	76	76	178	178	320	320	320	320							
External unit	191	270	348	427	506	585	663	761	839	918	996	1.075	1.154	1.233	1.310

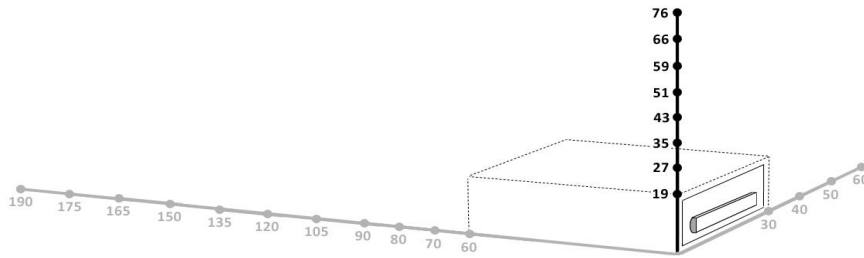


DEPTH	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Drawer inside	457	557	657	757	902	1.047	1.192	1.337	1.482	1.627	1.772				
Percentage of tray opening (%)	76%	80%	83%	85%	82%	85%	87%	88%	89%	90%	91%				
Standard partition	-	-	-	-	1 partition is fitted during production										
Max. load capacity per drawer	60 KG					100 KG									
External unit	591	691	791	891	1.036	1.181	1.326	1.471	1.616	1.761	1.906				

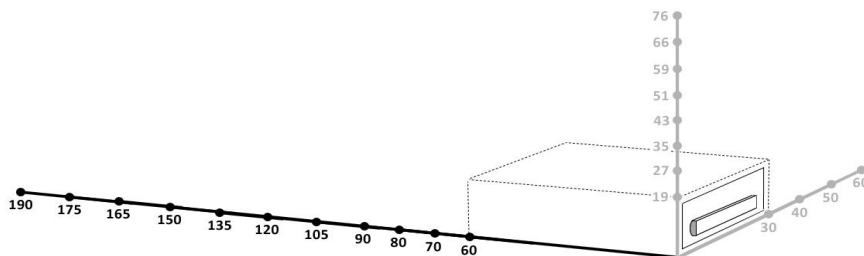


Technical specifications



WIDTH	30	40	50	60	-	-	-	-	-	-	-	-	-	-
Open compartment inside	275	374	473	572										
External unit	315	415	515	615										

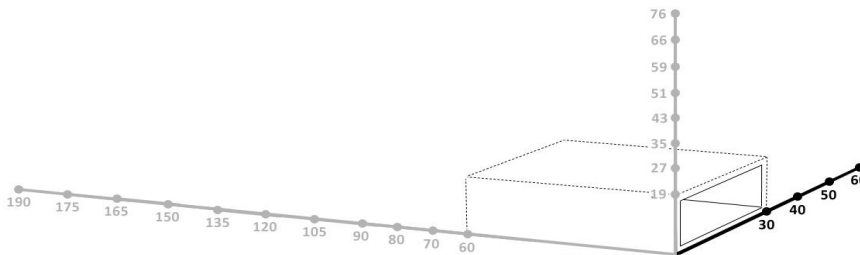

HEIGHT	19	27	35	43	51	59	66	76	-	-	-	-	-	-
Open compartment inside	161	240	318	397	476	555	633	731						
External unit	191	270	348	427	506	585	663	761						

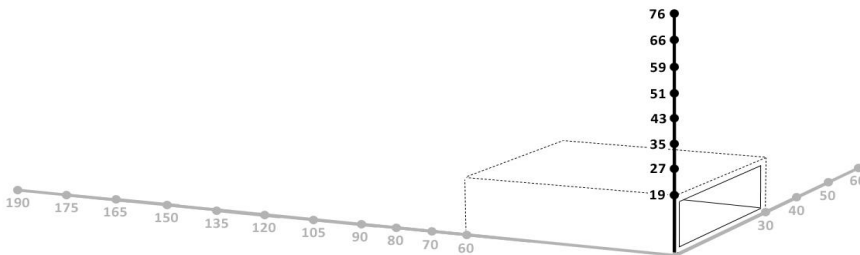

DEPTH	60	70	80	90	105	120	135	150	165	175	190	-	-	-	-
Open compartment inside	540	640	740	840	985	1.130	1.275	1.420	1.565	1.710	1.855				
External unit	556	656	756	856	1.001	1.146	1.291	1.436	1.581	1.726	1.871				

